


DYNA FLEX

SEWER CLEANING

SWROE (ORANGE) 2,500 PSI

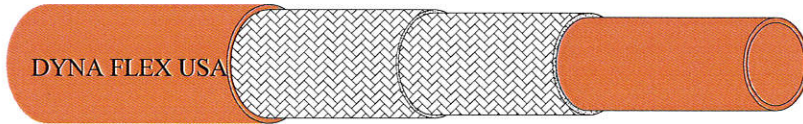

Recommended For: Use on high pressure sewer cleaning equipment.

Inner Core: Orange seamless polyolefin tube.

Reinforcement: Two braids of high tensile synthetic fiber.

Cover: Bonded orange high abrasion mold and fungus resistant polyether-urethane, featuring an anti-stick additive for a snag resistant slick surface.

Temperature Range: -40 degrees F. to +150 degrees F.
(-40 degrees C. to +66 degrees C.)

Hose Part No.	Nominal I.D.		Nominal O.D.		Maximum Oper. Press.		Minimum Burst Press.		Min. Bend Radius (In.)	Wt. Per 100 Ft. (Lbs.)
	In.	mm.	In.	mm.	PSI	Bar	PSI	Bar		
SWROE-12	3/4	19.05	1.18	29.85	2,500	172	6,250	431	5	29
SWROE-16	1	25.40	1.43	36.32	2,500	172	6,250	431	6	40
SWRO-20	1-1/4	31.75	1.79	45.47	2,500	172	6,250	431	8	60