


# ***DYNA FLEX***

# SAE 100R8 TWIN-LINE

## **8110T (ORANGE) NONCONDUCTIVE TWIN-LINE**

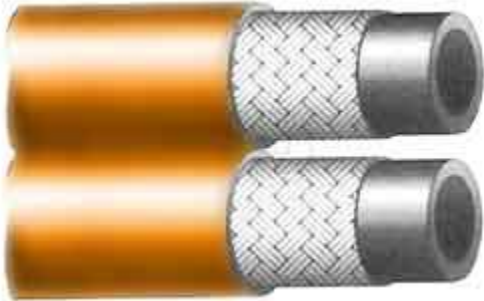

**Recommended For:** Medium pressure hydraulic and pneumatic systems. Meets or exceeds SAE 100R8 requirements. For pneumatic systems use perforated (**pin-pricked**) hose.

**Innecore:** Synthetic oil resistant polyester tube

**Reinforcement:** Braided high tensile aramid fiber

**Cover:** Orange high abrasion resistant polyurethane

**Temperature Range:** -65 degrees F. to +212 degrees F.  
(-54 degrees C. to +100 degrees C.)

Hose Part No.	Nominal I.D.		Nominal O.D.		Maximum Oper. Press.		Minimum Burst Press.		Min. Bend Radius (In.)	Wgt. Per 100 Ft. (Lbs.)
	In.	mm.	In.	mm.	PSI	BAR	PSI	BAR		
8110-03T	3/16	4.76	.390	9.91	5,000	345	20,000	1397	3/4	5.5
8110-04T	1/4	6.35	.480	12.19	5,000	345	20,000	1379	1-1/4	7.0
8110-06T	3/8	9.53	.645	16.38	4,000	276	16,000	1103	2	10.5
8110-08T	1/2	12.70	.810	20.57	3,500	241	14,000	965	3	15.0

***DYNA FLEX, INC.***  
**7300 INDUSTRIAL PARK BLVD.**  
**MENTOR, OHIO 44060 U.S.A.**

PHONE: (440) 946-0719 TOLL FREE: (800) 525-8463 FAX: (440) 946-4620  
Web Site: [www.dynaflexinc.com](http://www.dynaflexinc.com) E-Mail: [sales@flexinc.com](mailto:sales@flexinc.com)