


# DYNA FLEX

SAE 100R18  
1811 (BLACK)

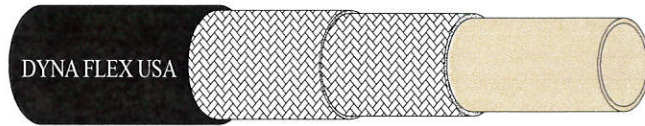

**Recommended For:** Medium pressure lift truck for over the sheave (pulley) type system.

**Inner Core:** Oil resistant seamless thermoplastic elastomer tube.

**Reinforcement:** Braided high tensile synthetic fiber.

**Cover:** Black high abrasion resistant polyurethane.

**Temperature Range:** -40 degrees F. to +212 degrees F.  
(-40 degrees C. to +100 degrees C.)

Hose Part No.	Nominal I.D.		Nominal O.D.		Maximum Oper. Press.		Minimum Burst Press.		Min. Bend Radius (In.)	Wt. Per 100 Ft. (Lbs.)
	In.	mm.	In.	mm.	PSI	Bar	PSI	Bar		
1811-04*	1/4	6.35	.485	12.30	3,000	207	12,000	827	1-1/4	6.6
1811-05	5/16	7.94	.610	15.49	3,000	207	12,000	827	1-3/4	10.1
1811-06	3/8	9.53	.660	16.76	3,000	207	12,000	827	2-1/2	13.0
1811-08	1/2	12.70	.880	22.35	3,000	207	12,000	827	3-1/2	19.7

*\*Single Braid*