


DYNA FLEX

SEWER JETTING

SWRG (GREEN) 4,000 PSI

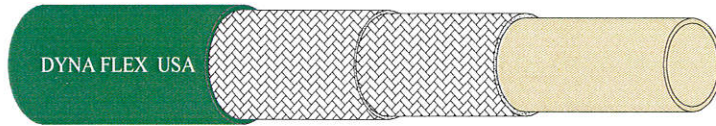

Recommended For: Use on high pressure sewer jetting equipment.

Inner Core: Seamless thermoplastic elastomer tube.

Reinforcement: High tensile synthetic fiber.

Cover: Bonded green high abrasion mold and fungus resistant polyether-urethane, featuring an anti-stick additive for a snag resistant slick surface.

Temperature Range: -40 degrees F. to +150 degrees F.
(-40 degrees C. to +66 degrees C.)

Hose Part No.	Nominal I.D.		Nominal O.D.		Maximum Oper. Press.		Minimum Burst Press.		Min. Bend Radius (In.)	Wt. Per 100 Ft. (Lbs.)
	In.	mm.	In.	mm.	PSI	Bar	PSI	Bar		
SWRG-02*	1/8	3.18	.320	7.75	4,000	276	10,000	689	1-1/4	3.4
SWRG-03*	3/16	4.76	.410	10.29	4,000	276	10,000	689	1.7	6.5
SWRG-A-04*	1/4	6.35	.485	12.32	4,000	276	10,000	689	2.0	7.5
SWRG-A-06*	3/8	9.53	.655	16.64	4,000	276	10,000	689	2	11
SWRG-08	1/2	12.70	.840	21.34	4,000	276	10,000	689	3	16
SWRG-10	5/8	15.87	1.01	25.65	4,000	276	10,000	689	4	25
SWRG-12	3/4	19.05	1.18	29.97	4,000	276	10,000	689	5	30.5

**Single braid*

DYNA FLEX, INC.
7300 INDUSTRIAL PARK BLVD.
MENTOR, OHIO 44060 U.S.A.

PHONE: (440) 946-0719 TOLL FREE: (800) 525-8463 FAX: (440) 946-4620
Web Site: www.dynaflexinc.com E-Mail: sales@flexinc.com Rev L, Nov 26, 2018