


DYNA FLEX

1040NC-04

HYDRAULIC 10,000 PSI

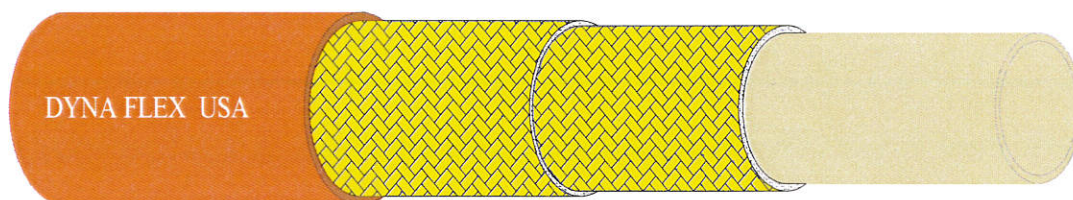

Recommended For: Hydraulic applications which require high pressure, flexibility, and light weight. This hose is only available as a completed assembly.

Inner Core: Nylon 11,

Reinforcement: Two braids of high tensile aramid fiber

Cover: Orange polyester-elastomer

Temperature Range: -40 degrees F. to +212 degrees F.
(-40 degrees C. to +100 degrees C.)

Hose Part No.	Nominal I.D.		Nominal O.D.		Maximum Oper. Press.		Minimum Burst Press.		Min. Bend Radius (In.)	Wt. Per 100 Ft (Lbs.)
	In.	mm.	In.	mm.	PSI	Mpa	PSI	Mpa		
1040NC-04	1/4	6.35	.560	14.2	10,000	69	40,000*	275.8	3	10.2

* Not applicable with JIC fittings

DYNA FLEX, INC.
7300 INDUSTRIAL PARK BLVD.
MENTOR, OHIO 44060 U.S.A.

PHONE: (440) 946-0719 TOLL FREE: (800) 525-8463 FAX: (440) 946-4620
Web Site: www.dynaflexinc.com E-mail: sales@flexinc.com Rev. A Nov, 11, 2014