


# **DYNA Flex, Inc.**

## **Electrically Conductive Hose 5,000 PSI**

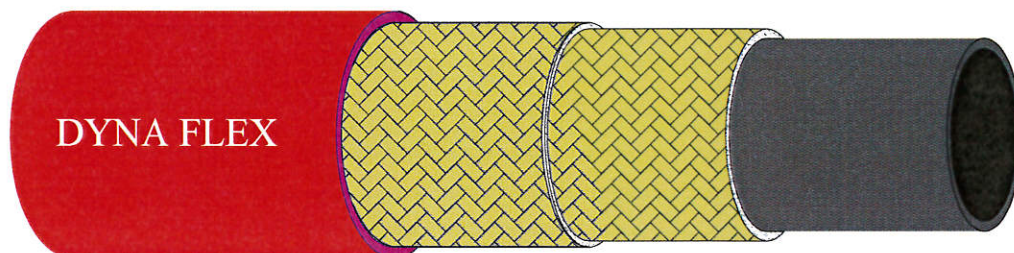

**Innercore:** Electrically conductive (< one Megohm per meter), seamless nylon tube

**Reinforcement:** High tensile Aramid fiber

**Cover:** Red, bonded, abrasion & UV resistant polyurethane, pin pricked, crush resilient.

**Temperature Range:** -40 degrees F. to +185 degrees F.  
(-40 degrees C. to +85 degrees C.)

Hose Part No.	Nominal I.D.		Nominal O.D.		Maximum Oper. Press.		Minimum Burst Press.		Min. Bend Radius (In.)	Wt. Per 100 Ft. (Lbs.)
	In.	mm.	In.	mm.	PSI	Mpa	PSI	Mpa		
EC-04 *	1/4	6.35	.55	14	5,000	34.5	20,000	138	2	8.8
EC-06	3/8	9.53	.70	17.8	5,000	34.5	20,000	138	3	13
EC-08	1/2	12.7	.89	22.6	5,000	34.5	20,000	138	4	20.7

\* Single braid

**DYNA FLEX, INC.**  
**7300 INDUSTRIAL PARK BLVD.**  
**MENTOR, OHIO 44060 U.S.A.**

PHONE: (440) 946-0719 TOLL FREE: (800) 525-8463 FAX: (440) 946-4620  
Web Site: [www.dynaflexinc.com](http://www.dynaflexinc.com) E-Mail: [sales@flexinc.com](mailto:sales@flexinc.com) Rev A, Jan 18, 2016