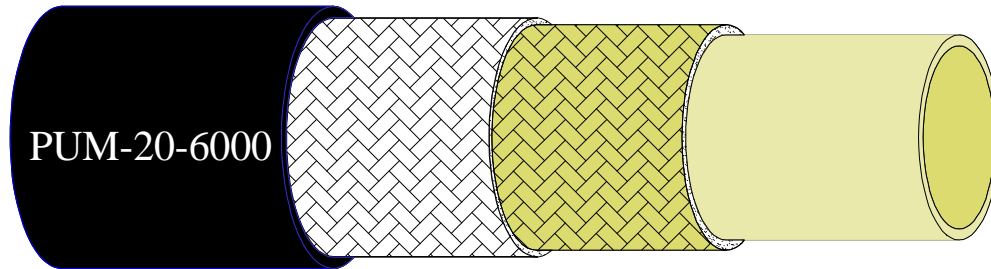


DYNA FLEX**1,500 PSI HYDRAULIC (UMBILICAL)**

Black Cover

**Innecore:** Neutral seamless polyester tube**Reinforcement:** One braid of aramid fiber, one braid of high tensile synthetic fiber**Cover:** Black, polyurethane**Temperature Range:** -40 degrees F. to +212 degrees F.
(-40 degrees C. to +100 degrees C.)

Hose Part No.	Nominal I.D.		Nominal O.D.		Max. Oper.		Min. Burst Press.		Bend Radius		Wt. Lbs/Ft.
	Inches	MM	Inches	MM	PSI	Bar	PSI	Bar	Inches	MM	
PUM-20-6000	1-1/4	31.8	1.72	43.70	1,500	103	6,000	414	12	304.8	0.50

DYNA FLEX, INC.
7300 INDUSTRIAL PARK BLVD.
MENTOR, OHIO 44060 U.S.A.

PHONE: (440) 946-0719 TOLL FREE: (800) 525-8463 FAX: (440) 946-4620
Web Site: www.dynaflexinc.com E-Mail: sales@flexinc.com Rev B, April 23, 2013