


DYNA FLEX

SEWER CLEANING

SEWER CLEANING (ORANGE) 2,500 PSI

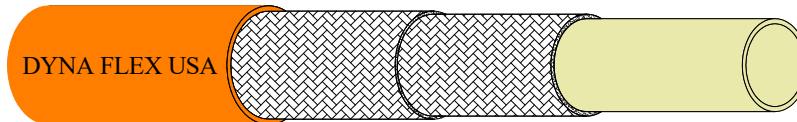

Recommended For: Use on high pressure sewer cleaning equipment.

Inner Core: Seamless thermoplastic elastomer tube.

Reinforcement: Two braids of high tensile synthetic fiber.

Cover: Bonded orange high abrasion mold and fungus resistant polyether-urethane, featuring an anti-stick additive for a snag resistant slick surface.

Temperature Range: -40 degrees F. to +150 degrees F.
(-40 degrees C. to +66 degrees C.)

Hose Part No.	Nominal I.D.		Nominal O.D.		Maximum Oper. Press.		Minimum Burst Press.		Min. Bend Radius (In.)	Wt. Per 100 Ft. (Lbs.)
	In.	mm.	In.	mm.	PSI	Bar	PSI	Bar		
CLE2500-12	3/4	19.05	1.18	29.85	2,500	172	6,250	431	5	29
CLE2500-16	1	25.40	1.43	36.32	2,500	172	6,250	431	6	40