


DYNA FLEX

SEWER CLEANING

SEWER CLEANING (BLUE) 3,000 PSI

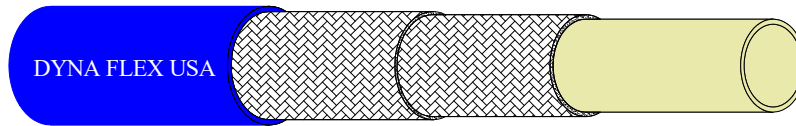

Recommended For: Use on high pressure sewer cleaning equipment.

Inner Core: Seamless thermoplastic elastomer tube.

Reinforcement: Two braids of high tensile synthetic fiber.

Cover: Bonded blue high abrasion mold and fungus resistant polyether-urethane, featuring an anti-stick additive for a snag resistant slick surface.

Temperature Range: -40 degrees F. to +150 degrees F.
(-40 degrees C. to +66 degrees C.)

Hose Part No.	Nominal I.D.		Nominal O.D.		Maximum Oper. Press.		Minimum Burst Press.		Min. Bend Radius (In.)	Wt. Per 100 Ft. (Lbs.)
	In.	mm.	In.	mm.	PSI	Bar	PSI	Bar		
CLE3000-12	3/4	19.05	1.18	29.85	3,000	207	7,500	517	5	29
CLE3000-16	1	25.40	1.44	37.08	3,000	207	7,500	517	7	42

DYNA FLEX, INC.
1000 Bacon Rd.
Painesville, OHIO 44077 U.S.A.

PHONE: (440) 946-9424
Web Site: www.dynaflexinc.com E-Mail: sales@flexinc.com